NXC-165AT-FR

Metal ceiling speaker with fire dome

AT A GLANCE

10 W

100 V

6.5 inch

Metal ceiling speaker with fire dome for installed audio applications.



Supplied product photograph.

TECHNICAL SPECIFICATIONS

Load rating	10 W
100 V transformer taps	10 / 5 / 2.5 W
Frequency range	150 Hz–15 kHz
SPL (1 W / 1 m)	92 dB
Driver / impedance	6.5 inch / 8 ohm
Diameter / installation depth (max)	Dia. 210 / 91 mm
Weight	Approx. 0.96 kg
Colour	White
Construction	Full metal / steel pot case
Mounting	Two spring-action brackets


The source describes fireproof and UV-proof construction but supplies no EN54, fire test certificate or compliance document. No certification is claimed here.

CONSTRUCTION & DIMENSION REFERENCE







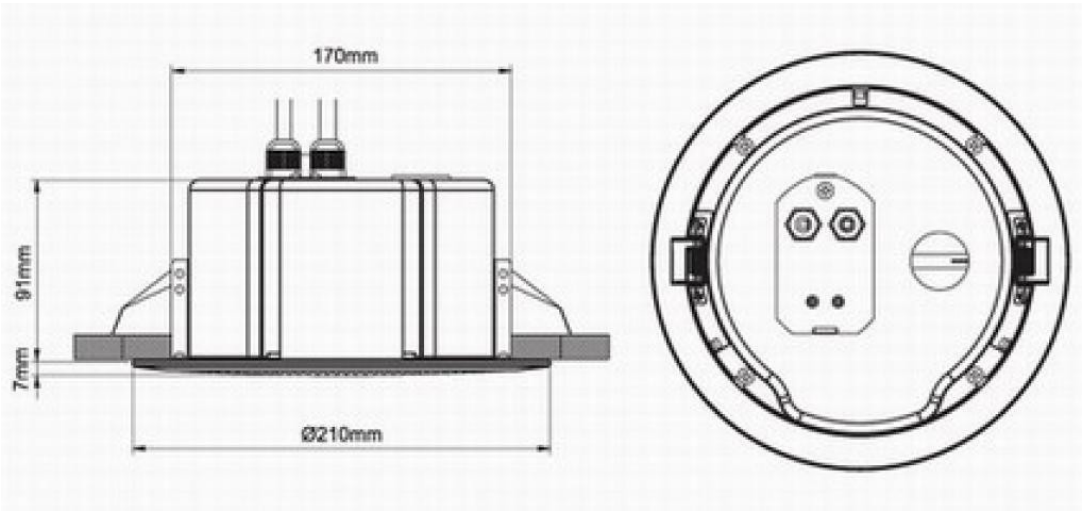

Original source images and dimensional drawing. The table states Dia. 210 mm and maximum installation depth 91 mm; the drawing shows additional dimensions. Confirm the cutout and fit on the actual unit.

Fire resistance and evacuation-system approval must be checked against the required project certificates. No certification document was supplied.